




Typical Application:

1. Massager / Vibrator.
2. Radio Control Model.

Weight: 28g (Approx.)



METAL BRUSH AND CARBON BRUSH MOTORS, FLAT TYPES AND ROUND TYPES ARE ALL AVAILABLE.

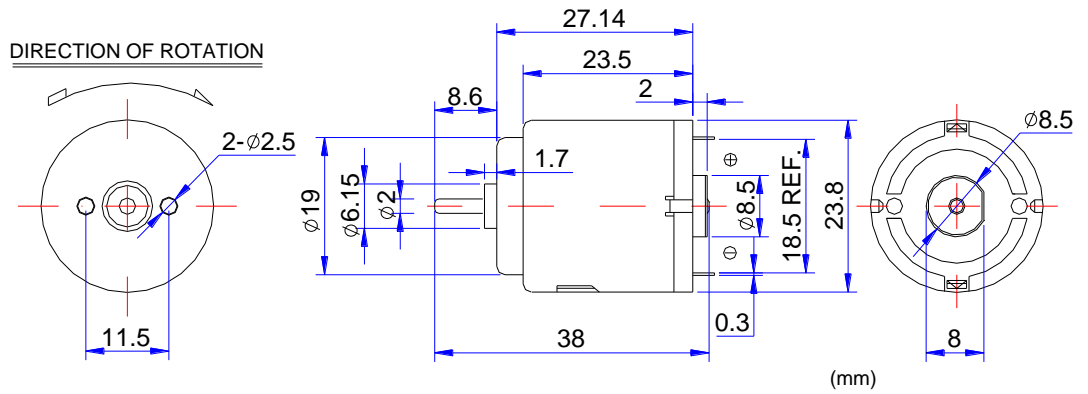

ELECTRICAL SPECIFICATION CHART: (The following specifications can be changed as customers' requirement)

Model	Voltage		At No Load		At Max Efficiency					Stall Torque G.CM
	Workable Range	Nominal	Speed	Current	Speed	Current	Torque	Output	Eff.	
			RPM	A	RRPM	A	G.CM	W	%	
RA260-20100	1.5~12.0	3.0V CONSTANT	9,600	0.13	7,600	0.50	12.00	0.93	62.3	57
RA260-18130	4.5~6.0	4.5V CONSTANT	9,800	0.14	7,700	0.53	15.00	1.18	49.6	72
		6.0V CONSTANT	13,600	0.16	10,900	0.64	16.00	1.79	46.6	86
RA260-2670	1.5~12.0	4.5V CONSTANT	18,300	0.30	15,100	1.43	21.00	3.25	50.5	125
		3.0V CONSTANT	14,000	0.25	11,400	0.88	15.80	1.83	66.0	85
RA260S-2295	3.0~6.0	4.8V CONSTANT	10,800	0.17	8,900	0.85	24.00	2.19	53.7	145
		6.0V CONSTANT	13,500	0.18	11,300	0.97	28.00	3.25	55.8	181
RA260S-2670	3.0~4.5	4.5V CONSTANT	13,800	0.25	11,700	1.10	25.00	3.00	80.6	170

CHARACTERISTIC CURVES:

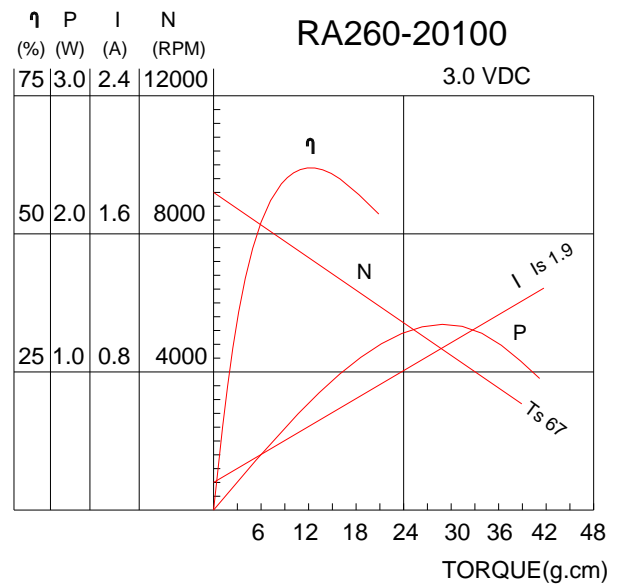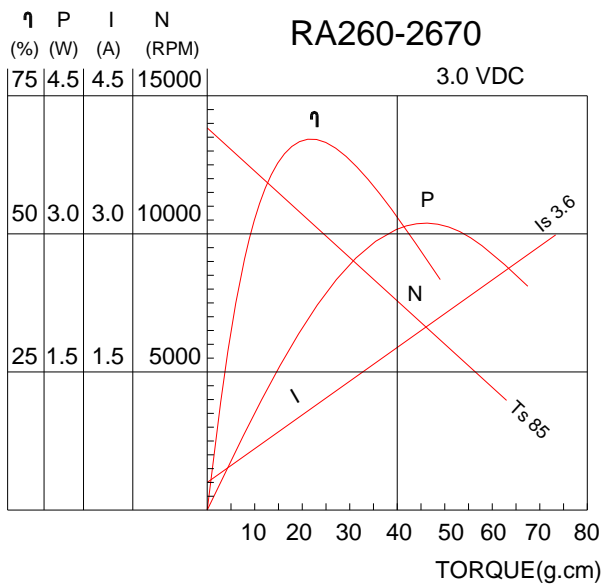

Shenzhen Nostop Electric Co., Ltd

Building C#, Gangzhilong Science & Technology Industrial Park, Qinglong Road, Longhua Town,
Shenzhen City, Guangdong Province, 518107 P.R.China

TEL: +86.755. 2983 4766, 2815 9775, 2815 9776 FAX: +86.755. 2967 4299

E-mail: stony@nostop.cn

URL: <http://www.nostopmotor.com>, <http://www.nostop.cn>