


ALUMINUM ELECTROLYTIC CAPACITORS · SNAP-IN TYPE

# CD 29H QH SERIES

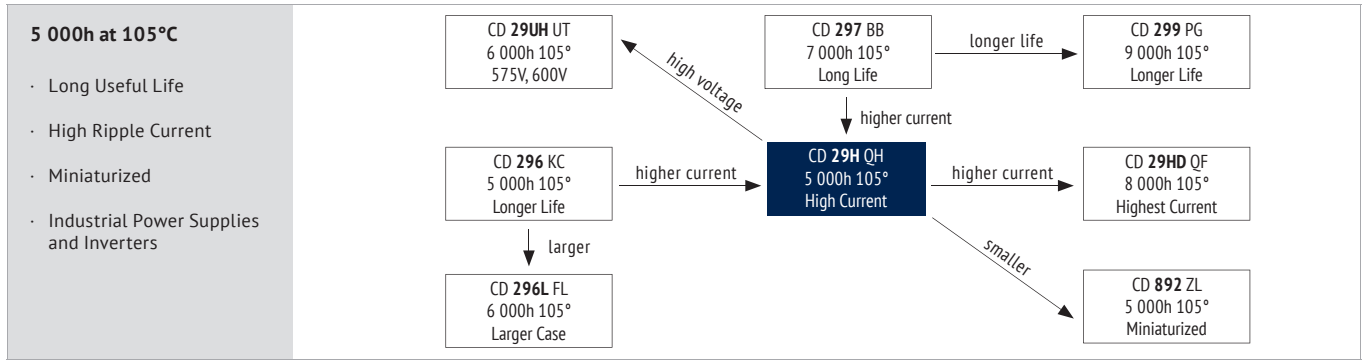

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +105
Voltage Range (V)	160 ~ 450
Capacitance Range (µF)	47 ~ 2 200
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	160 ~ 450
	$Z_{-40°C} / Z_{+20°C}$	4

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	5 000h	> 100 000h	3 000h	3 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	
Condition:						
Applied Voltage	$U_R$	$U_R$	$U_R$	$U_R$	$U_R = 0$	After test: $U_R$ to be applied for 30 min > 24h before measurement
Applied Current	$I_R$	$1,4 \times I_R$	$I_R$	$I_R = 0$	$I_R = 0$	
Applied Temperature	105°C	50°C	105°C	105°C IEC 60384	105°C	

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	≥ 50 kHz
<b>Coefficient</b>	0,80	1,00	1,16	1,30	1,41	1,45

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

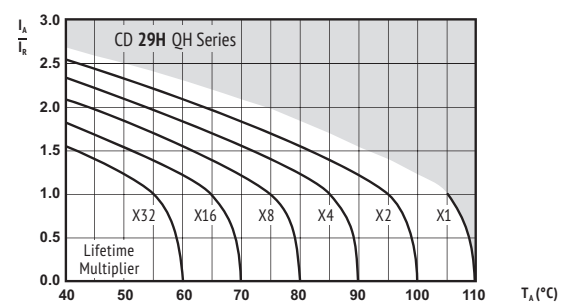

$I_A$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**!** Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

**ENVIRONMENTAL**

The products are RoHS, WEEE and REAcH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**!** SAFETY FACTOR

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.



U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 5
<b>160 (200) 2C</b>	330	603	355	0,15	0,5	1,42	22 x 25	ECS2CQH331M◇◇△△2225
	390	511	300	0,15	0,6	1,45	25 x 25	ECS2CQH391M◇◇△△2525
	470	424	245	0,15	0,8	1,63	22 x 35	ECS2CQH471M◇◇△△2235
	560	356	215	0,15	0,9	1,75	22 x 35	ECS2CQH561M◇◇△△2235
		356	215	0,15	0,9	1,75	25 x 30	ECS2CQH561M◇◇△△2530
		356	215	0,15	0,9	1,75	30 x 25	ECS2CQH561M◇◇△△3025
		293	178	0,15	1,1	1,98	22 x 40	ECS2CQH681M◇◇△△2240
	680	293	178	0,15	1,1	1,98	25 x 35	ECS2CQH681M◇◇△△2535
		243	145	0,15	1,3	2,35	22 x 50	ECS2CQH821M◇◇△△2250
	820	243	145	0,15	1,3	2,35	25 x 40	ECS2CQH821M◇◇△△2540
		243	145	0,15	1,3	2,35	30 x 30	ECS2CQH821M◇◇△△3030
		243	145	0,15	1,3	2,35	35 x 25	ECS2CQH821M◇◇△△3525
	1 000	199	115	0,15	1,5	2,50	25 x 45	ECS2CQH102M◇◇△△2545
		199	115	0,15	1,5	2,50	30 x 35	ECS2CQH102M◇◇△△3035
		199	115	0,15	1,5	2,50	35 x 30	ECS2CQH102M◇◇△△3530
	1 200	166	95	0,15	1,5	2,87	25 x 50	ECS2CQH122M◇◇△△2550
		166	95	0,15	1,5	2,87	30 x 40	ECS2CQH122M◇◇△△3040
		166	95	0,15	1,5	2,87	35 x 35	ECS2CQH122M◇◇△△3535
	1 500	133	75	0,15	1,5	3,57	30 x 45	ECS2CQH152M◇◇△△3045
		133	75	0,15	1,5	3,60	35 x 40	ECS2CQH152M◇◇△△3540
	1 800	111	68	0,15	1,5	4,15	35 x 45	ECS2CQH182M◇◇△△3545
	2 200	91	58	0,15	1,5	4,65	35 x 50	ECS2CQH222M◇◇△△3550

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 5
<b>200 (250) 2D</b>	220	905	550	0,15	0,4	1,10	22 x 25	ECS2DQH221M◇◇△△2225
	270	737	460	0,15	0,5	1,17	22 x 25	ECS2DQH271M◇◇△△2225
	330	603	370	0,15	0,7	1,40	22 x 30	ECS2DQH331M◇◇△△2230
		603	370	0,15	0,7	1,40	25 x 25	ECS2DQH331M◇◇△△2525
	390	511	310	0,15	0,8	1,45	22 x 30	ECS2DQH391M◇◇△△2230
	470	424	260	0,15	0,9	1,55	22 x 35	ECS2DQH471M◇◇△△2235
		424	260	0,15	0,9	1,55	25 x 30	ECS2DQH471M◇◇△△2530
		424	260	0,15	0,9	1,60	30 x 25	ECS2DQH471M◇◇△△3025
	560	356	220	0,15	1,1	1,65	22 x 45	ECS2DQH561M◇◇△△2245
		356	220	0,15	1,1	1,65	25 x 35	ECS2DQH561M◇◇△△2535
		293	180	0,15	1,4	1,68	22 x 50	ECS2DQH681M◇◇△△2250
	680	293	180	0,15	1,4	1,92	25 x 40	ECS2DQH681M◇◇△△2540
		293	180	0,15	1,4	1,92	30 x 30	ECS2DQH681M◇◇△△3030
		293	180	0,15	1,4	2,20	35 x 25	ECS2DQH681M◇◇△△3525
	820	243	150	0,15	1,5	2,20	25 x 45	ECS2DQH821M◇◇△△2545
		243	150	0,15	1,5	2,20	30 x 35	ECS2DQH821M◇◇△△3035
		243	150	0,15	1,5	2,40	35 x 30	ECS2DQH821M◇◇△△3530
	1 000	199	120	0,15	1,5	2,40	30 x 40	ECS2DQH102M◇◇△△3040
		199	120	0,15	1,5	2,40	35 x 35	ECS2DQH102M◇◇△△3535
		166	100	0,15	1,5	2,75	30 x 45	ECS2DQH122M◇◇△△3045
	1 200	166	100	0,15	1,5	2,75	35 x 40	ECS2DQH122M◇◇△△3540
		133	80	0,15	1,5	3,45	35 x 40	ECS2DQH152M◇◇△△3540
	1 800	111	68	0,15	1,5	4,00	35 x 45	ECS2DQH182M◇◇△△3545
	2 200	91	56	0,15	1,5	4,50	35 x 50	ECS2DQH222M◇◇△△3550

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 5
<b>250 (300) 2E</b>	180	1106	620	0,15	0,5	1,00	22 x 25	ECS2EQH181M◇◇△△2225
	220	905	570	0,15	0,6	1,20	22 x 30	ECS2EQH221M◇◇△△2230
		905	570	0,15	0,6	1,20	25 x 25	ECS2EQH221M◇◇△△2525
	270	737	470	0,15	0,7	1,25	22 x 35	ECS2EQH271M◇◇△△2235
		603	380	0,15	0,8	1,30	22 x 40	ECS2EQH331M◇◇△△2240
	330	603	380	0,15	0,8	1,35	25 x 30	ECS2EQH331M◇◇△△2530
		603	380	0,15	0,8	1,35	30 x 25	ECS2EQH331M◇◇△△3025
		511	325	0,15	1,0	1,40	22 x 45	ECS2EQH391M◇◇△△2245
	390	511	325	0,15	1,0	1,45	25 x 35	ECS2EQH391M◇◇△△2535
		424	268	0,15	1,2	1,65	22 x 50	ECS2EQH471M◇◇△△2250
	470	424	268	0,15	1,2	1,65	30 x 30	ECS2EQH471M◇◇△△3030
		424	268	0,15	1,2	1,65	35 x 25	ECS2EQH471M◇◇△△3525
		356	225	0,15	1,4	1,85	25 x 45	ECS2EQH561M◇◇△△2545
	560	356	225	0,15	1,4	1,85	30 x 35	ECS2EQH561M◇◇△△3035
		356	225	0,15	1,4	1,85	35 x 30	ECS2EQH561M◇◇△△3530
	680	293	185	0,15	1,5	2,20	25 x 50	ECS2EQH681M◇◇△△2550
		293	185	0,15	1,5	2,20	30 x 40	ECS2EQH681M◇◇△△3040

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 5
<b>250 (300) 2E</b>	820	243	153	0,15	1,5	2,50	30 x 45	ECS2EQH821M◇◇△△3045
		243	153	0,15	1,5	2,50	30 x 50	ECS2EQH821M◇◇△△3050
	1 000	199	125	0,15	1,5	2,90	30 x 50	ECS2EQH102M◇◇△△3050
		199	125	0,15	1,5	2,90	35 x 40	ECS2EQH102M◇◇△△3540
	1 200	166	105	0,15	1,5	3,30	35 x 45	ECS2EQH122M◇◇△△3545
	1 500	133	85	0,15	1,5	3,80	35 x 50	ECS2EQH152M◇◇△△3550
<b>350 (400) 2V</b>	68	2926	1280	0,15	0,2	0,70	22 x 25	ECS2VQH680M◇◇△△2225
	100	1990	1060	0,15	0,4	0,87	22 x 30	ECS2VQH101M◇◇△△2230
		1990	1060	0,15	0,4	0,87	25 x 25	ECS2VQH101M◇◇△△2525
	120	1658	880	0,15	0,4	0,90	22 x 35	ECS2VQH121M◇◇△△2235
		1327	700	0,15	0,5	0,98	22 x 40	ECS2VQH151M◇◇△△2240
	150	1327	700	0,15	0,5	1,02	25 x 30	ECS2VQH151M◇◇△△2530
		1327	700	0,15	0,5	1,02	30 x 25	ECS2VQH151M◇◇△△3025
	180	1106	580	0,15	0,6	1,11	22 x 45	ECS2VQH181M◇◇△△2245
		1106	580	0,15	0,6	1,11	25 x 35	ECS2VQH181M◇◇△△2535
		1106	580	0,15	0,6	1,12	30 x 30	ECS2VQH181M◇◇△△3030
	220	905	470	0,15	0,8	1,16	22 x 50	ECS2VQH221M◇◇△△2250
		905	480	0,15	0,8	1,20	25 x 40	ECS2VQH221M◇◇△△2540
		905	480	0,15	0,8	1,20	35 x 25	ECS2VQH221M◇◇△△3525
	270	737	390	0,15	0,9	1,26	25 x 50	ECS2VQH271M◇◇△△2550
		737	390	0,15	0,9	1,31	30 x 35	ECS2VQH271M◇◇△△3035
		737	390	0,15	0,9	1,26	35 x 30	ECS2VQH271M◇◇△△3530
	330	603	320	0,15	1,2	1,45	30 x 45	ECS2VQH331M◇◇△△3045
		603	320	0,15	1,2	1,45	35 x 35	ECS2VQH331M◇◇△△3535
	390	511	270	0,15	1,4	1,58	30 x 50	ECS2VQH391M◇◇△△3050
		511	270	0,15	1,4	1,58	35 x 40	ECS2VQH391M◇◇△△3540
	470	424	228	0,15	1,5	1,69	35 x 45	ECS2VQH471M◇◇△△3545
	560	356	190	0,15	1,5	1,89	35 x 50	ECS2VQH561M◇◇△△3550

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 5
<b>400 (450) 2G</b>	68	2341	1260	0,12	0,3	0,48	22 x 25	ECS2GQH680M◇◇△△2225
	82	1941	1050	0,12	0,3	0,57	22 x 30	ECS2GQH820M◇◇△△2230
		1941	1050	0,12	0,3	0,56	25 x 25	ECS2GQH820M◇◇△△2525
	100	1592	860	0,12	0,4	0,65	22 x 35	ECS2GQH101M◇◇△△2235
		1592	860	0,12	0,4	0,65	25 x 25	ECS2GQH101M◇◇△△2525
	120	1327	718	0,12	0,5	0,71	22 x 35	ECS2GQH121M◇◇△△2235
		1327	718	0,12	0,5	0,71	25 x 30	ECS2GQH121M◇◇△△2530
		1327	718	0,12	0,5	0,71	30 x 25	ECS2GQH121M◇◇△△3025
	150	1062	575	0,12	0,6	0,85	22 x 40	ECS2GQH151M◇◇△△2240
		1062	575	0,12	0,6	0,85	25 x 35	ECS2GQH151M◇◇△△2535
		1062	575	0,12	0,6	0,85	30 x 25	ECS2GQH151M◇◇△△3025
	180	885	479	0,12	0,7	1,00	22 x 50	ECS2GQH181M◇◇△△2250
		885	479	0,12	0,7	1,00	25 x 40	ECS2GQH181M◇◇△△2540
		885	479	0,12	0,7	1,00	30 x 30	ECS2GQH181M◇◇△△3030
	220	885	479	0,12	0,7	1,00	35 x 25	ECS2GQH181M◇◇△△3525
		724	292	0,12	0,9	1,20	25 x 45	ECS2GQH221M◇◇△△2545
		724	292	0,12	0,9	1,20	30 x 35	ECS2GQH221M◇◇△△3035
	270	724	292	0,12	0,9	1,20	35 x 30	ECS2GQH221M◇◇△△3530
		590	319	0,12	1,1	1,35	25 x 50	ECS2GQH271M◇◇△△2550
	330	590	319	0,12	1,1	1,35	30 x 40	ECS2GQH271M◇◇△△3040
		590	319	0,12	1,1	1,35	35 x 30	ECS2GQH271M◇◇△△3530
	390	483	260	0,12	1,3	1,60	30 x 45	ECS2GQH331M◇◇△△3045
		483						


U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 5
(V)	(μF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
<b>450 (500) 2W</b>	150	1062	530	0,12	0,7	0,95	22 x 50	ECS2WQH151M◇◇△△2250
		1062	530	0,12	0,7	0,95	25 x 40	ECS2WQH151M◇◇△△2540
		1062	530	0,12	0,7	0,95	30 x 30	ECS2WQH151M◇◇△△3030
		1062	530	0,12	0,7	0,95	35 x 25	ECS2WQH151M◇◇△△3525
	180	885	530	0,12	0,8	1,05	25 x 45	ECS2WQH181M◇◇△△2545
		885	530	0,12	0,8	1,05	30 x 35	ECS2WQH181M◇◇△△3035
	220	724	360	0,12	1,0	1,30	25 x 50	ECS2WQH221M◇◇△△2550
		724	360	0,12	1,0	1,30	30 x 40	ECS2WQH221M◇◇△△3040
		724	360	0,12	1,0	1,30	35 x 30	ECS2WQH221M◇◇△△3530
	270	590	295	0,12	1,2	1,50	30 x 45	ECS2WQH271M◇◇△△3045
		590	295	0,12	1,2	1,50	35 x 35	ECS2WQH271M◇◇△△3535
	330	483	240	0,12	1,5	1,90	30 x 50	ECS2WQH331M◇◇△△3050
		483	240	0,12	1,5	1,90	35 x 40	ECS2WQH331M◇◇△△3540
	390	409	205	0,12	1,5	1,90	35 x 45	ECS2WQH391M◇◇△△3545
	470	339	170	0,12	1,5	2,20	35 x 50	ECS2WQH471M◇◇△△3550

**ORDER CODE SNAP-IN TYPE**

EC	S	2G	QC	221	M	T6	P2	2535	-	JExxxxx									
Techno-logy	Terminal Type		Series Code		Capacitance Code		Capacitance Tolerance		Terminal Style	Terminal / Pitch		Dimension (mm)		Material Code		for Specials only			
EC Electrolytic Capacitor	Snap-In	S	6,3V	<b>0J</b>	CD 293	<b>BZ</b>	0,1	<b>0R1</b>	<b>±20%</b>	<b>M</b>	4,0mm Pin Length	<b>T/L4</b>	<b>2 Pin</b>	<b>P2</b>	22x40	<b>2240</b>	Standard	-	
			10V	<b>1A</b>	CD 294	<b>BW</b>	0,47	<b>R47</b>	±10%	<b>K</b>	<b>6,3mm Pin Length</b>	<b>T/L6</b>	3 Pin	<b>P3</b>	30x45	<b>3045</b>	PVC	<b>V</b>	
			16V	<b>1C</b>	CD 295	<b>BC</b>	1,0	<b>010</b>	+30/-10%	<b>Q</b>	Soldering Pin	<b>S4</b>	4 Pin	<b>P4</b>	35x80	<b>3580</b>	PET	<b>E</b>	
			20V	<b>1D</b>	CD 295S	<b>BS</b>	2,2	<b>2R2</b>	+20/-0%	<b>R</b>	on request: alternative pin types  ■ = preferred		5 Pin	<b>P5</b>	45x100	<b>45100</b>			
			25V	<b>1E</b>	CD 296	<b>KC</b>	100	<b>101</b>	±15%	<b>L</b>			6 Pin	<b>P6</b>	50x105	<b>50105</b>			
			35V	<b>1V</b>	CD 296L	<b>FL</b>	1 000	<b>102</b>	+20/-10%	<b>V</b>									
			40V	<b>1G</b>	CD 297	<b>BB</b>	10 000	<b>103</b>											
			50V	<b>1H</b>	CD 299	<b>PG</b>													
			63V	<b>1J</b>	CD 29C	<b>QC</b>													
			80V	<b>1K</b>	CD 29D	<b>HR</b>													
			100V	<b>2A</b>	CD 29H	<b>QH</b>													
			125V	<b>2B</b>	CD 29HD	<b>QF</b>													
			160V	<b>2C</b>	CD 29L	<b>QL</b>													
			180V	<b>2K</b>	CD 29U	<b>CU</b>													
			200V	<b>2D</b>	CD 29UH	<b>UT</b>													
			250V	<b>2E</b>	CD 840	<b>ZQ</b>													
			315V	<b>2F</b>	CD 891	<b>ZJ</b>													
			350V	<b>2V</b>	CD 892	<b>ZL</b>													
			385V	<b>2J</b>	CD 895	<b>ZK</b>													
			400V	<b>2G</b>															
			415V	<b>2P</b>															
			420V	<b>2X</b>															
			450V	<b>2W</b>															
			500V	<b>2H</b>															
550V	<b>2Y</b>																		
575V	<b>2Z</b>																		
600V	<b>2S</b>																		
630V	<b>J2</b>																		



## 2 PIN TYPE: T6P2 / T4P2 STANDARD

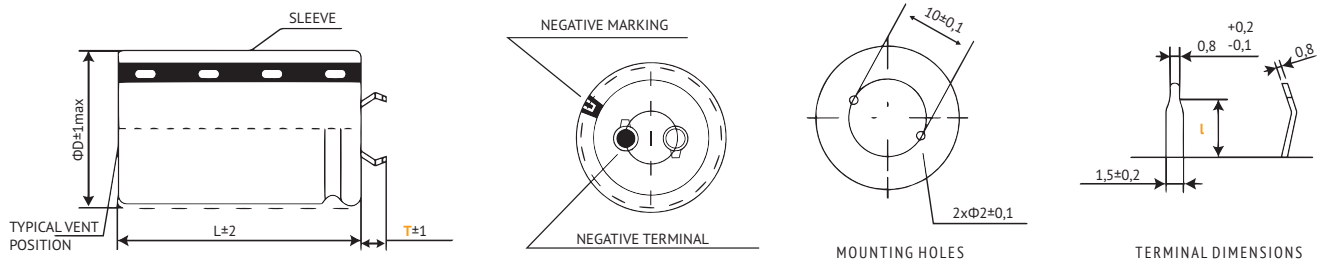


Standard Version: Self-Lock Terminal. Other terminal types and styles on request.  
For diameter  $\phi D \geq 45$  mm the safety vent is typically placed at the side of the housing.

Terminal	T6 (preferred)	T4
Pin Length $T$	6,3 mm	4,0 mm
Pin Detail $l$	3,5 mm	2,5 mm

**!** Max. Current Snap-In Terminal: 15A  
For more current please ask for Lug-Terminals.

in mm

## 3 PIN TYPE: T4P3

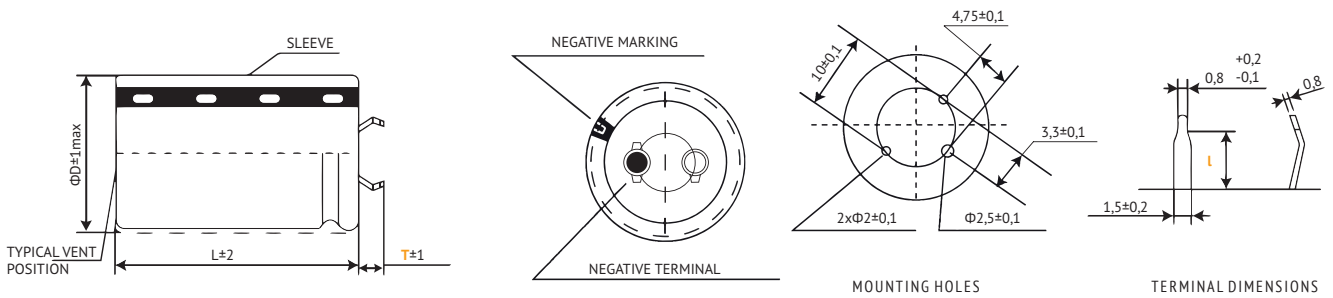


For diameter  $\phi D \geq 45$  mm the safety vent is typically placed at the side of the housing.

Terminal	T6	T4
Pin Length $T$	-	4,0 mm
Pin Detail $l$	-	2,5 mm

**!** Max. Current Snap-In Terminal: 15A  
For more current please ask for Lug-Terminals.

in mm

## 4 PIN TYPE: T6P4/T4P4 STANDARD

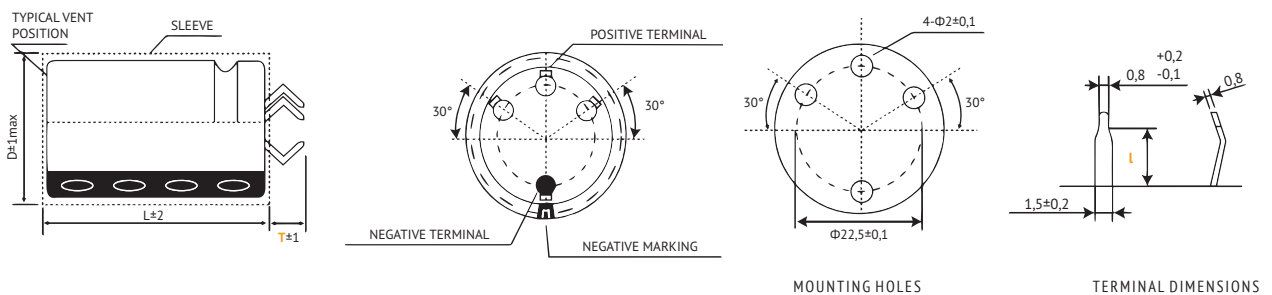

Standard Version: Non-Lock-Terminal. Other terminal types and styles on request.  
For  $\phi D \geq 30$  mm only.  
For diameter  $\phi D \geq 45$  mm the safety vent is typically placed at the side of the housing.


Terminal	T6 (preferred)	T4
Pin Length $T$	6,3 mm	4,0 mm
Pin Detail $l$	3,5 mm	2,5 mm

**!** Max. Current Snap-In Terminal: 15A  
For more current please ask for Lug-Terminals.

in mm



## 4 PIN TYPE: L6P4/L4P4 SELF-LOCK TERMINAL

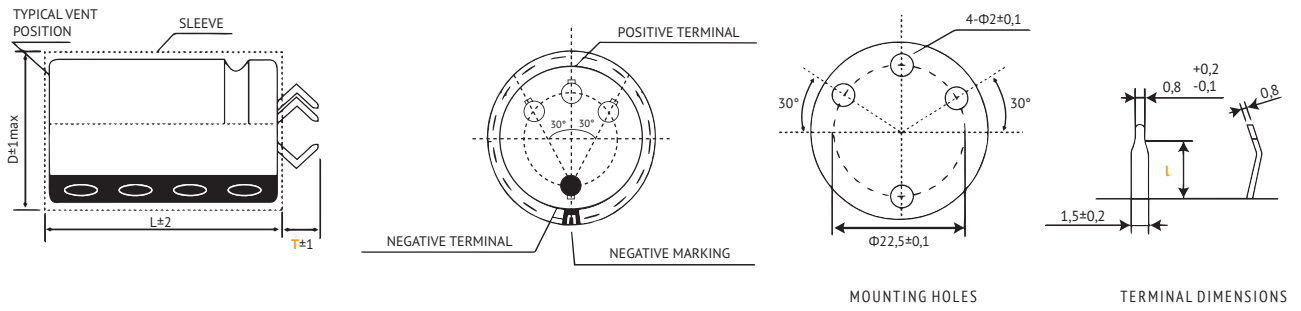


For  $\varnothing D \geq 30\text{mm}$  only. Other terminal types and styles on request.  
For diameter  $\varnothing D \geq 45\text{mm}$  the safety vent is typically placed at the side of the housing.

Terminal	T6 (preferred)	T4
Pin Length $T$	6,3 mm	4,0 mm
Pin Detail $l$	3,5 mm	2,5 mm

⚠ Max. Current Snap-In Terminal: 15A  
For more current please ask for Lug-Terminals.

in mm

## 5 PIN TYPE: S4P5 SOLDERING PIN

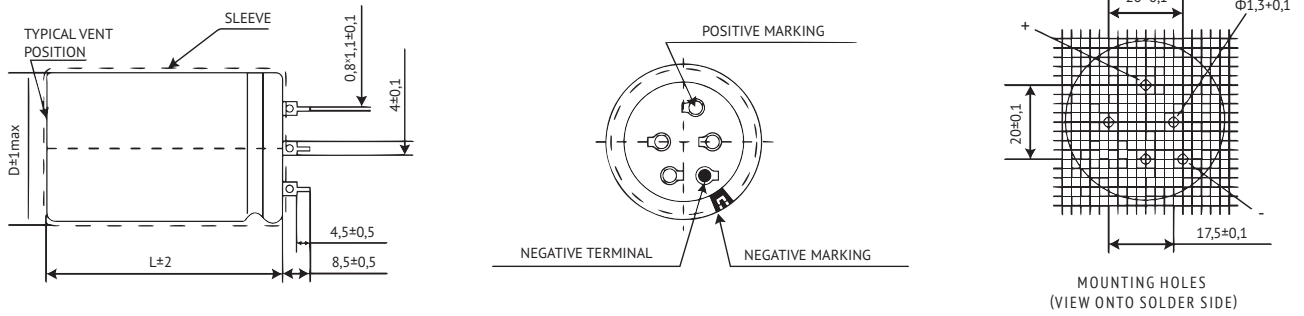


For  $\varnothing D \geq 30\text{mm}$  only.  
For diameter  $\varnothing D \geq 45\text{mm}$  the safety vent is typically placed at the side of the housing.

⚠ Max. Current Snap-In Terminal: 15A  
For more current please ask for Lug-Terminals.

in mm

## EXAMPLE: AXIAL MOUNTING

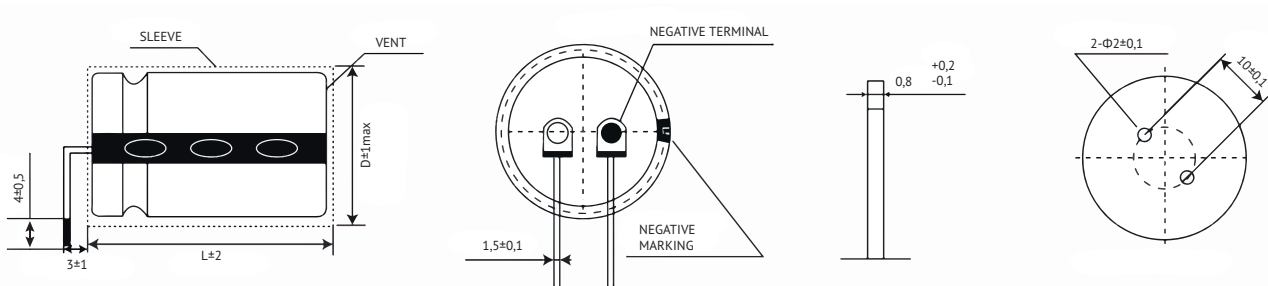


For  $\varnothing D \geq 25\text{mm}$  only.  
Available also for high vibration usage.

⚠ Max. Current Snap-In Terminal: 15A  
For more current please ask for Lug-Terminals.


in mm

Other Terminal Styles on request.

**SNAP-IN  
85°C**

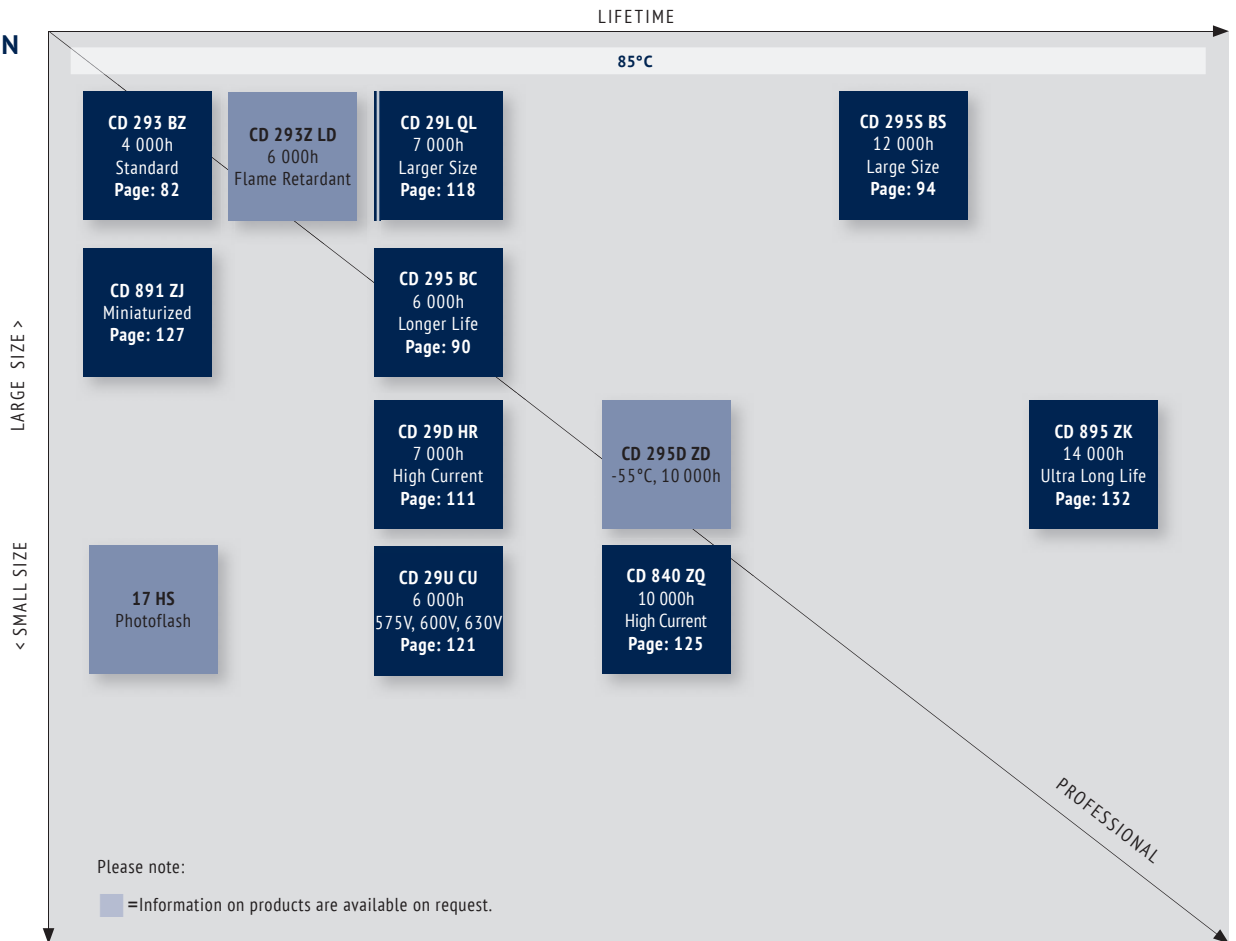

**SNAP-IN  
105°C/  
125°C**

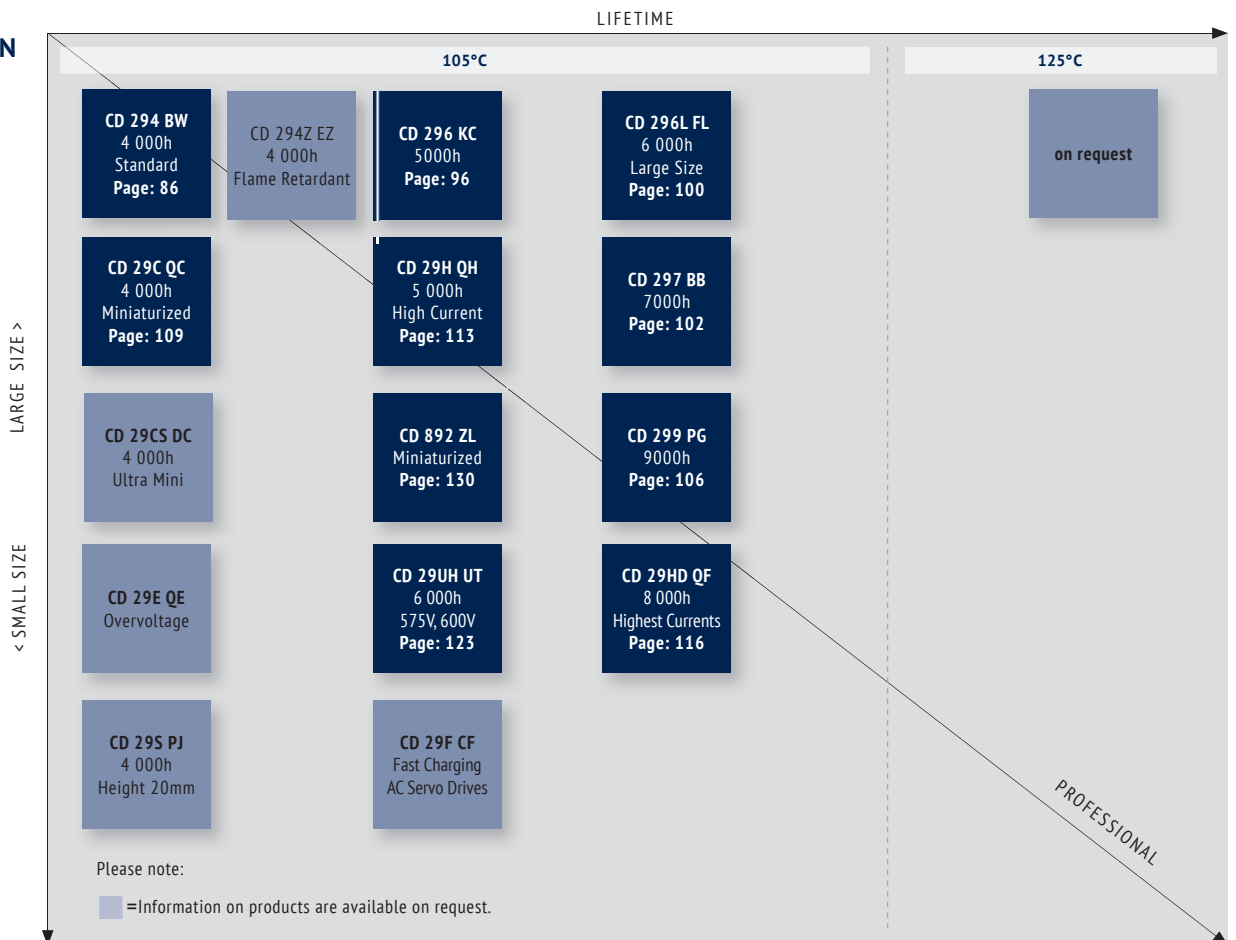



## LIFETIME ESTIMATION OF ALUMINUM ELECTROLYTIC CAPACITORS FROM JIANGHAI

To estimate the Lifetime of a non-solid Aluminum Electrolytic Capacitor from Jianghai, the following formulas can be utilized. The Lifetime depends mainly on the ambient temperature, the ripple current and, within certain limits, the operating voltage applied. Other parameters may also affect the Lifetime. Moreover,  $L_0$  can be interpreted in many different ways, which has a fundamental influence on the numerical result. Jianghai offers a high transparency by publishing the different typical definitions of Lifetimes in each datasheet. Lifetime estimations are approximations by nature. Please let JIANGHAI EUROPE confirm any result before using it. The formulas given here do not constitute part of a contract nor of a specification. The formulas do not cover additional aging effects of certain electrolytic systems or other chemical effects. Also the dimensions of the components may have an effect. Forced cooling or other additional cooling-methods have a strong impact on the Lifetime and are not covered by the formulas as defined. For the estimation and interpretation of Lifetime, a close collaboration with JIANGHAI EUROPE is strongly advised.

### STRUCTURAL FORMULA

$$L = L_0 \cdot K_T \cdot K_R \cdot K_V$$

WHERE:

- L Total Lifetime
- $L_0$  Lifetime under Nominal Load at Upper Category Temperature (see catalogue)
- $K_T$  Temperature Factor
- $K_R$  Ripple Current Factor
- $K_V$  Voltage Factor

### $K_T$ TEMPERATURE FACTOR

Aluminum Electrolytic Capacitors follow roughly the 10 K rule of Arrhenius. It is possible to estimate the Lifetime by rule of thumb: When the operational temperature is reduced by 10 K, the Lifetime will double. The formula for  $K_T$  in detail is:

$$K_T = 2^{\frac{T_0 - T_A}{10K}}$$

WHERE:

- $T_0$  Rated Temperature
- $T_A$  Ambient Temperature

### $K_R$ RIPPLE CURRENT FACTOR

To estimate the influence of ripple current on lifetime, Jianghai uses a safety factor  $K_i$ . Under certain conditions this value can be set to  $K_i=2$ , which is prolonging the lifetime. Please contact Jianghai Europe for details and approval.

$$K_R = K_i^A \frac{\Delta T_0}{10K}$$

WITH:

$$A = 1 - \left( \frac{I_A}{I_R} \right)^2$$

WHERE:

- $I_A$  Actual Rated Ripple Current
- $I_R$  Ripple Current at Upper Category Temperature (databook value)
- $\Delta T_0$  Core Temperature Rise of the capacitor (typically 3,5 ~ 5 K for  $T_0 = 105^\circ\text{C}$  and 3,5 ~ 10K for  $T_0 = 85^\circ\text{C}$ , see databook value)
- $K_i$  Basis, typically defined as
 

$T_0 = 105^\circ\text{C}$	$I_A > I_R$ :	$K_i=4$
	$I_A \leq I_R$ :	$K_i=2$
$T_0 = 85^\circ\text{C}$		$K_i=2$



*Remark: Safety Factor  $K_i$  may be set as  $K_i=2$  under certain defined conditions. Please contact Jianghai Europe for approval.*

### $K_V$ VOLTAGE FACTOR

For Radial Electrolytic Capacitors, this part of the formula has no impact ( $K_V = 1$ ). But for some bigger capacitors like Snap-In and Screw-Terminal types with rated voltages above 160V, the operating voltage will affect their Lifetime. It is expressed as follows:

FOR:

$$0,6 \leq \frac{U_A}{U_R} \leq 1$$

$$K_V = \left( \frac{U_A}{U_R} \right)^{-2,5}$$

WHERE:

- $U_A$  Actual Operating Voltage
- $U_R$  Rated Voltage

FOR:

$$0 < \frac{U_A}{U_R} < 0,6$$

$$K_V = 3,59$$

FOR:

$$\frac{U_A}{U_R} > 1 \text{ not allowed}$$

$$K_V = 1$$

FOR: Radial Capacitors or  $U_R \leq 160V$

$$K_V = 1$$

### FREQUENCY CORRECTION FACTORS:

If the actual Ripple Currents are not given at the same frequency like  $I_{\sigma}$ , correction factors need to be applied.

$$I_A = \sqrt{\left(\frac{I_{f1}}{F_{f1}}\right)^2 + \left(\frac{I_{f2}}{F_{f2}}\right)^2 + \dots + \left(\frac{I_{fn}}{F_{fn}}\right)^2}$$

### JIANGHAI ELECTROLYTIC CAPACITOR LIFETIME

#### ESTIMATION FORMULA (incl. Safety Factors):

$$L = L_0 \cdot 2^{\frac{T_0 - T_A}{10K}} \cdot K_i \left[ 1 - \left(\frac{I_A}{I_R}\right)^2 \right]^{\frac{\Delta T_0}{10K}} \cdot \underbrace{\left(\frac{U_A}{U_R}\right)^{-n}}_{K_V}$$

WITH TYPICAL VALUES:

$$T_0 = 105^\circ\text{C} \quad I_A > I_R : K_i = 4$$

$$I_A \leq I_R : K_i = 2$$

$$T_0 = 85^\circ\text{C} \quad K_i = 2$$

$\Delta T_0 =$  depending on the series: 3,5~10K,  
see databook value

$$0,6 \leq \frac{U_A}{U_R} \leq 1 \rightarrow n = 2,5$$

$$0 < \frac{U_A}{U_R} < 0,6 \rightarrow K_V = \left(\frac{U_A}{U_R}\right)^{-n} = 3,59$$

For  $U_R \leq 160V$ , Radial and

$$\frac{U_A}{U_R} > 1 \rightarrow K_V = 1$$

## HANDLING PRECAUTIONS FOR ALUMINUM ELECTROLYTIC CAPACITORS FROM JIANGHAI

### WARNING

JIANGHAI is not liable for any extent of possible injuries or damages to persons or things, of any kind, caused by the improper application of and/or operating conditions harmful to electrolytic capacitors. Misapplications which may cause failures include, but are not limited to: ripple current or peak current or voltage above specification, operating voltage above surge voltage specified, temperature exposure outside the specified operating temperature range. Examples of harmful operating conditions comprise, but are not limited to: unusual storage or transport temperatures, excessive and/or rapid changes of ambient temperature or humidity, heavy mechanical shock or vibration, corrosive and abrasive particles in the ambient (cooling) air, conducting dust in the ambient (cooling) air, oil or water vapor or corrosive substances, explosive gas or dust, operation under extremely high or low ambient pressure conditions (below or above sea level), superimposed radio frequency voltages, radioactivity. In case of doubt about the impact of operating conditions on capacitor performance, please contact JIANGHAI.

### PERSONAL SAFETY

Electrical or mechanical misapplication of electrolytic capacitors may be hazardous. Personal injury or property damage may result from explosion of a capacitor or from the expulsion of electrolyte due to mechanical disruption or the release of a safety vent of a capacitor. In case of injury or skin or eye exposure to electrolyte, immediately seek professional medical advice. Before using electrolytic capacitors in any application, please read these Handling Precautions, familiarizing thoroughly with the information contained herein. Please check before using any of our electrolytic capacitors if these components fulfill the requirements of your application and that warnings and instructions for use are followed.

### WARRANTY

The information contained in this catalogue does not form part of any quotation or contract, is believed to be accurate, reliable and up to date. Quality data are based on the statistical evaluations of a large quantity of parts and do not constitute a guarantee in a legal sense. However, agreement on these specifications does mean that the customer may claim for replacement of individual defective capacitors within the terms of delivery. We will not assume any liability beyond the replacement of defective components. This applies in particular to any consequential damage caused by component failure. Furthermore it must be taken into consideration that the figures stated for lifetime, failure rates and outlier percentages refer to the average production status and are therefore to be understood as mean values (statistic expectations) for a large number of delivery lots of identical capacitors. These figures are based on application experience and data obtained from preceding tests under normal conditions, or – for purpose of accelerated aging – more severe conditions. JIANGHAI reserves the right to change these specifications without prior notice. Any application information given is advisory and does not form part of any specification. The products are not primarily designed for use in life support applications, devices or systems where malfunction of these products can reasonably be expected to result in personal injury. JIANGHAI customers using or selling these products for use in such applications without prior written consent of JIANGHAI do so at their own risk and agree fully to indemnify JIANGHAI for any damage resulting from such improper use or sale. This version of the catalogue supersedes all previous versions. Latest versions of datasheets can be found on our homepage: [www.jianghai-europe.com](http://www.jianghai-europe.com). For more details on precautions and guidelines for aluminum electrolytic capacitors, please refer to CENELEC Technical Report CLC/TR 50454:2008 E, "Guide for the application of aluminum electrolytic capacitors".

### POLARITY

Electrolytic capacitors are polar and shall never be used with incorrect polarity, as there is a possible danger of shorting or destruction.

### RATED VOLTAGE $U_R$

The rated voltage is marked on the capacitor and defined in the datasheets as  $U_R$ . This voltage should never be exceeded and is the maximum peak voltage including any ripple voltages allowed to avoid a shortening of the lifetime or damage of the capacitor. When a ripple current is applied to the capacitor, the sum of the peak ripple voltage and bias DC voltage shall never exceed the rated voltage. It might be necessary to lower the maximum allowed bias DC voltage, when certain ripple currents are applied to the capacitor.

### SURGE VOLTAGE

Maximum voltage, which may be applied to the capacitor for short periods of time: max. 1000 cycles of 30 sec. per 6 min., max. 5 pulses per hour. Capacitance drift +/- 15% max.

### REVERSE VOLTAGE

Reverse voltages or voltages < 0V are not allowed.

## RECOVERY VOLTAGE

Electric potential between the positive and negative terminal may exist as a result of dielectric absorption. Please take action that this load does not damage other devices or scare workers during the production process (sparks possible). If needed please discharge the capacitor through a 1kΩ resistor.

## TEMPERATURE RANGE

Use electrolytic capacitors only within the specified operating temperature range.

## OVER-CURRENT

Currents exceeding the rated ripple currents should be avoided.

## RIPPLE CURRENT/VOLTAGE

The combined value of DC voltage and peak AC voltage (due to ripple current) shall not exceed the rated voltage and shall never be < 0V. Use of aluminum electrolytic capacitors under ripple current with wide amplitudes is equivalent to rapid charge-discharge operation.

## RAPID CHARGING/DISCHARGING

Rapid charging/discharging generates severe heat and gas may be emitted which may lead to explosion. Consult JIANGHAI about specially designed capacitors suitable for such kind of applications. Example: Servo Drive Application

## BALANCING RESISTORS

Balancing resistors should be utilized if capacitors are used in serial connection. Please choose low-tolerance resistors to limit voltage drift.

## CHARGE-DISCHARGE PROOF

JIANGHAI capacitors are charge-discharge proof, which means that 10<sup>6</sup> switching cycles will cause capacitance reduction of less than 10%.

## LIFETIME

There are many different lifetime definitions known without any true standard definition. Take special care when capacitors are compared that the capacitors fulfill the needed requirements. JIANGHAI publishes all conditions to be as transparent as possible. In the case of lifetime tests with additional ripple currents, the bias DC voltage must be reduced, so that the sum of bias DC voltage and the peak of the ripple voltage does not exceed the Rated Voltage  $U_R$ .

**Load life:** Period of time, during which the technical parameters of all capacitors stay within the given limits. JIANGHAI defines this without allowing for outliers.

**Useful life:** Defined like load life, but with a larger range of parameter change.

**Endurance test:** IEC 60384-4 defines the acceptable drift criteria of electrical parameters after the endurance tests (continuous voltage test).

**Shelf Life:** Definition of time with acceptable drift of capacitor parameters after storage at upper category temperature without load.

## VIBRATION AND MECHANICAL STRESS

Capacitors are sensitive to vibration and mechanical forces applied on the leads. Do not use capacitors, which have been dropped onto a rigid surface.

## INSULATION

If any defect of the sleeve is visible, the component should not be used – the same holds for any kind of visible damage. A capacitor should be electrically isolated from the following parts: aluminum case, cathode lead wire, anode lead wire and circuit pattern, and auxiliary terminal of snap-in type. The sleeve is not recognized as an isolator and therefore the standard capacitor should not be used in a place where insulation function is needed. Please contact JIANGHAI if a higher grade of insulation is required.

## ENVIRONMENTAL CONDITIONS

Avoid direct contact with water, salt solution, oil, dewing conditions. Halogens generally, especially fumigation treatment with bromides and flame retardant agents containing halogens must be avoided. Avoid exposing to direct sunshine, ozone, ultraviolet rays and x-ray radiation. Air Pressure: Max. 150kPa, min. 8kPa. For usage >2000m altitude above sea level current deratings might be necessary. No heavy air pressure changes are allowed. Do not use or store in an environment containing any hazardous gas (e.g., hydrogen sulphide, sulphurous acid, nitrous acid, chlorine, ammonia, bromine, methyl bromide, other halogens) or acidic or alkaline solutions.

## STORAGE

Temperature 5 to 35°C, relative humidity below 75%. Electrolytic capacitors may accumulate charge naturally during storage. In this case discharge through a 1kOhm resistor before use (Recovery voltage). Leakage current may be increased after long storage time. In this case the capacitor should be subjected to the rated voltage treatment through a 1kOhm resistor before use for 1 hour, then it should be discharged through a resistor of about 1 Ohm/Volt. Storage times above 1 year should be avoided or rated voltage treatment may be necessary. In accordance to IEC 60384-4 electrolytic capacitors are subject to a reforming process before acceptance testing. Rated voltage is applied via a series resistance (100Ω:  $U_R \leq 100VDC$ , 1kΩ:  $U_R > 100VDC$ ).

## SOLDERING

Soldering conditions (temperature, times) should be within specified conditions, especially for SMD components. Avoid high soldering temperatures as this may reduce lifetime or damage the capacitor. Do never dip the capacitor body into molten solder. Flux should not be adhered to the capacitor's body but only to its terminals. For details and different methods please contact us.

## GLUEING, CLEANING AND COATING

Do not use fixing agents or cleaning substances containing halogens. Do not use coating and moulding components that completely seal the capacitor from the environment. Also, never use solvents containing: halogenated hydrocarbons, alkali, petroleum, trichloroethylene/-ethane, xylene, acetones, trichlorotrifluoroethane, tetrachloroethylene, methylenechloride, chloroform, acetates, ketones, esters, chlorides and bromides.

## MOUNTING

Other devices, which are mounted near the capacitor, should not touch the capacitor. Additional heat coming from other components near the capacitor may reduce the lifetime of the capacitor. Do never bend or twist the capacitor after soldering to avoid stress on the leads. Radial capacitors are not protected against mechanical forces on the leads. Forces on the pins might damage the capacitor. No printed circuit board tracks are allowed between the lead pads of the capacitor. Screw Terminal capacitors should only be mounted in an upright position.

## TRANSPORT

Avoid fumigation and spraying insecticides (especially with bromides) in the import or export procedures which can cause corrosion. This applies also to the finished devices.

## MAINTENANCE

Periodical inspection should be carried out for the capacitor: visual inspection to check pressure relief open or leakage of electrolyte, electrical characteristics as leakage current, capacitance, and dissipation factor.

## ELECTROLYTE AND SEPARATOR PAPER

Electrolyte and separator paper used in aluminum capacitors may be flammable. Also, electrolyte is electrically conductive. Therefore, in case electrolyte gets in contact with PC board it may cause corrosion of circuit pattern or cause short circuit between patterns, and may lead to smoke generation or ignition in worst case.

## CAUTION DURING USE OF CAPACITORS

Do not touch the terminals of capacitors. Keep the capacitor free from conductive solution, such as acids, alkali and so on. Ensure that the operating environment of the equipment into which the capacitor has been built is within the specified conditions mentioned in the catalogue or specification sheets.

## SAFETY VENT

The safety vent needs some free space to open properly. Allow for free headroom of at least 2mm for diameter ≤16mm, more than 3mm for diameter 18-35mm, more than 5mm for case diameter 40mm and larger.

## EMERGENCY ACTIONS

When the pressure relief vent is open and some gas blows out from the capacitor, please turn the main switch of the equipment off or pull out the plug from the power outlet immediately. During safety vent operation, extremely hot gas (>100°C) may blow out of the capacitors. Do not stand close to the capacitors. In case of eye contact, rinse the open eye(s) with clean water immediately. In case of ingestion, gargle with water immediately, do not swallow. Do not touch electrolyte but wash skin with soap and water in case of skin contact.

## DEFINITION OF ELECTRICAL PARAMETERS

Separate documents as application notes, equivalent circuit diagrams and so on are available on request.

## PACKAGING

Please refer to the data book for details. Further information is available on request.

## DISPOSAL

Scrapped capacitors are classified as scrapped metal. For disposal they are handled as controllable industrial waste because of the nature of the contents (electrolyte). Most of the material is aluminum and cannot be completely burned.

*Jianghai Europe Electronic Components GmbH*

*VERSION 10/2021*