

Typical Application:

1. Household Appliances:
 - a) Massager
 - b) Hairdryer
2. Automobile Antenna.



Shaft Length (A): 57.0 67.0 (mm)
Shaft Extension (B): 16.4 26.4

* Carbon Brush Motor. * Plastic Bottom Cap. Weight: 59g (APPROX)

ELECTRICAL SPECIFICATION CHART: (The following specifications can be changed as customers' requirement)

Model	Voltage		At No Load		At Max Efficiency					Stall Torque G.CM
	Workable Range	Nominal	Speed RPM	Current A	Speed RRPM	Current A	Torque G.CM	Output W	Eff. %	
RC375S-1885	12~24V	12.0V Constant	11300	0.18	8980	0.70	50.7	4.62	55.0	245
		24.0V Constant	21800	0.20	18130	1.00	80.4	14.90	63.0	478
RC375S-2073	12~24V	12.0V Constant	12900	0.18	10510	0.79	53.4	5.70	60.5	288
		24.0V Constant	26120	0.22	22000	1.18	80.0	18.00	63.7	507
RC375S-2458	6.0~18.0	12.0V Constant	15700	0.25	12980	1.19	64.4	8.50	59.8	373
RC375S-2168	12~24.0	20.0V Constant	23450	0.30	20010	1.33	88.0	18.0	67.7	600
RC375S-2742	12~18.0	12.0V Constant	21500	0.38	17916	1.98	80.0	14.7	61.9	480

CHARACTERISTIC CURVES:

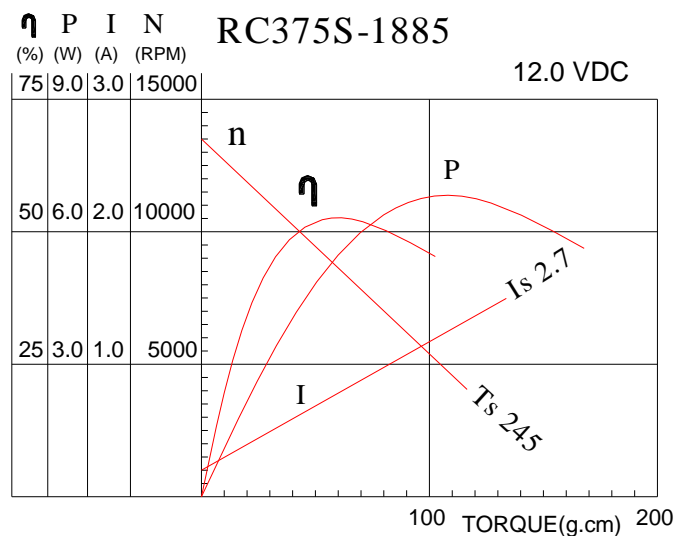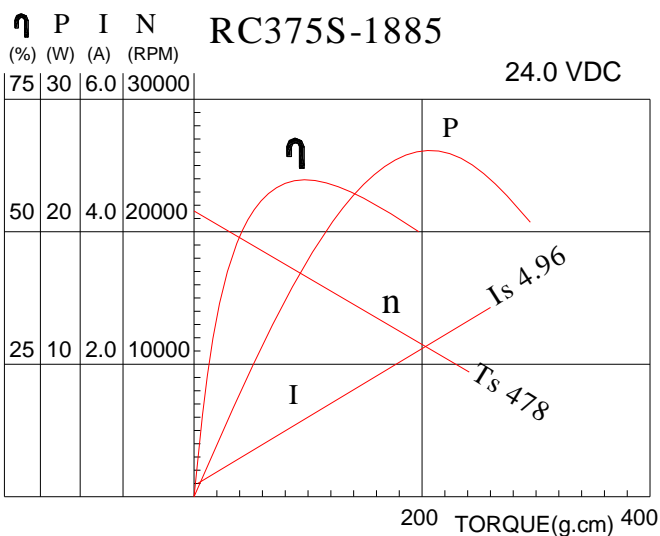

Shenzhen Nostop Electric Co., Ltd

Building C#, Gangzhilong Science & Technology Industrial Park, Qinglong Road, Longhua Town,

Shenzhen City, Guangdong Province, 518107 P.R.China

TEL: +86.755. 2983 4766, 2815 9775, 2815 9776 FAX: +86.755. 2967 4299

E-mail: stony@nostop.cn

URL: <http://www.nostopmotor.com>, <http://www.nostop.cn>