



Features:


* Carbon Brush Motor. * AC power source.

Weight:

268g (APPROX)

Typical Application:


1. Sewing Machine, Drills & Screw Drivers, etc.
2. Hand Mixer, Printer, etc.

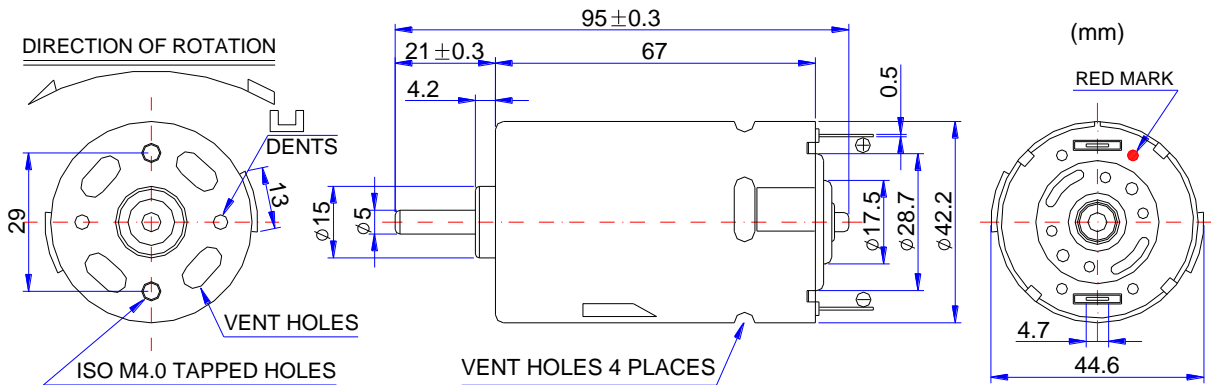

ELECTRICAL SPECIFICATION CHART: (The specifications can be changed as customers' requirement)

Model	Voltage		At No Load		At Max Efficiency					Stall Torque G.CM
	Workable Range	Nominal	Speed RPM	Current A	Speed RRPM	Current A	Torque G.CM	Output W	Eff. %	
RC7712SP-10200	100~230VAC	230V Constant	11000	0.05	8736	0.25	400	35.84	62.3	1943
RC7712SP-12160	100~230VAC	220V Constant	12736	0.06	10302	0.26	500	52.80	72.6	2616
RC7712SP-17105	100~230VAC	120V Constant	11110	0.10	9220	0.35	520	49.20	64.1	3057
RC7712SP-10180	100~230VAC	230V Constant	13500	0.08	10900	0.34	550	62.00	79.3	2900
RC7712SP-14140	100~120VAC	120V Constant	8500	0.10	6870	0.43	460	32.40	62.8	2400
RC7712SP-2054	100~120VAC	110V Constant	20000	0.30	16700	1.48	660	113.00	69.4	4000

CHARACTERISTIC CURVES:

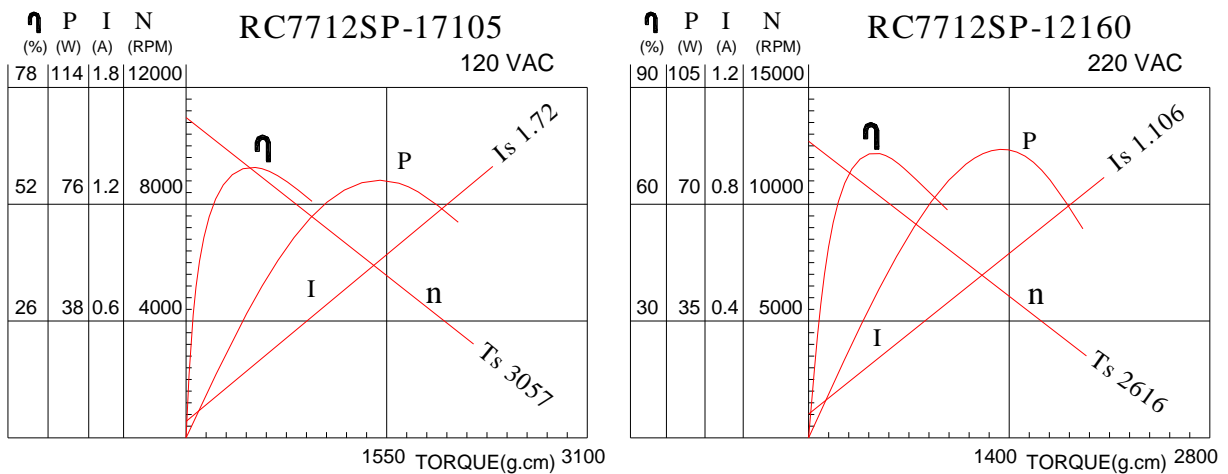

Shenzhen Nostop Electric Co., Ltd

Building C#, Gangzhilong Science & Technology Industrial Park, Qinglong Road, Longhua Town,
Shenzhen City, Guangdong Province, 518107 P.R.China

TEL: +86.755. 2983 4766, 2815 9775, 2815 9776 FAX: +86.755. 2967 4299

E-mail: stony@nostop.cn

URL: <http://www.nostopmotor.com>, <http://www.nostop.cn>