




**Typical Application:**

1. Precision Instruments: Automatic Vending Machine.
2. Household Appliances: Massager / Vibrator.
3. Office Automation Equipments: Copy Machine.

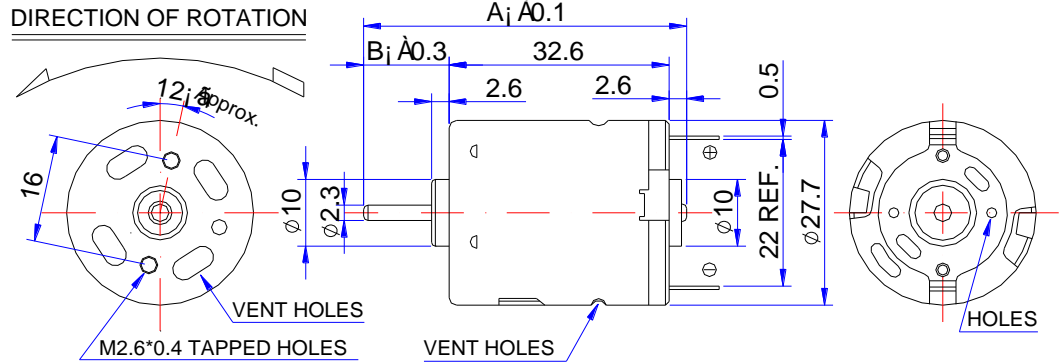



Shaft Length (A): 51.0 53.0 57.0  
Shaft Extension (B): 15.2 17.2 21.1

\* Carbon Brush Motor. Weight: 55g (APPROX)

**ELECTRICAL SPECIFICATION CHART: (The following specifications can be changed as customers' requirement)**

Model	Voltage		At No Load		At Max Efficiency					Stall Torque G.CM
	Workable Range	Nominal	Speed	Current	Speed	Current	Torque	Output	Eff.	
			RPM	A	RRPM	A	G.CM	W	%	
RC360-10500	12.0~30.0	24.0V Constant	9,300	0.06	7,310	0.22	34.0	2.57	49.0	160
RC360S-10500	12.0~30.0	24.0V Constant	6,800	0.06	5,360	0.20	44.5	2.45	51.0	210
RC360-14280	6.0~24.0	12.0V Constant	8,360	0.10	6,520	0.35	32.0	2.14	50.4	145
RC360S-14280	9.0~30.0	12.0V Constant	6,200	0.09	4,930	0.35	44.5	2.20	53.5	212
		24.0V Constant	12,560	0.10	10,470	0.50	61.5	6.60	55.0	370
RC360-24110	4.5~12.0	6.0V Constant	10,600	0.27	8,400	1.03	36.5	3.14	51.0	176
		9.0V Constant	16,000	0.28	13,140	1.28	46.5	6.28	54.6	261
RC360S-20150	6.0~24.0	12.0V Constant	11,800	0.20	9,660	0.90	61.5	6.10	56.5	340

**CHARACTERISTIC CURVES:**

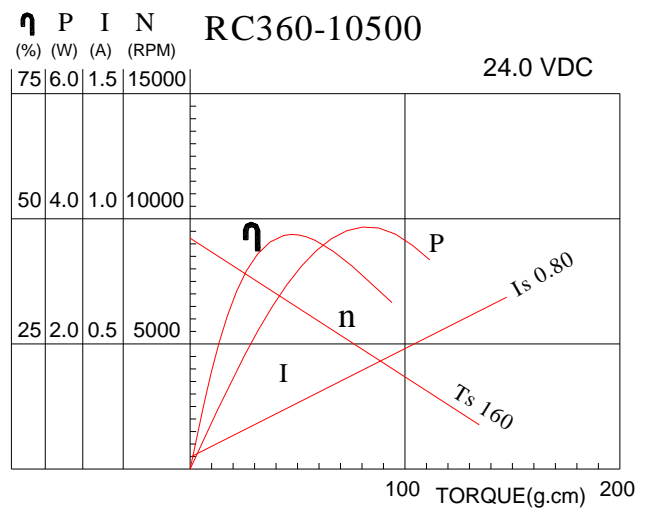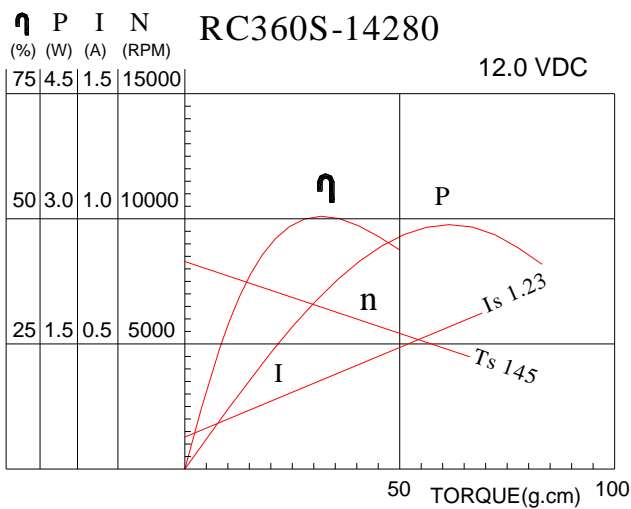

Shenzhen Nostop Electric Co., Ltd

Building C#, Gangzhilong Science & Technology Industrial Park, Qinglong Road, Longhua Town,  
Shenzhen City, Guangdong Province, 518107 P.R.China

TEL: +86.755. 2983 4766, 2815 9775, 2815 9776 FAX: +86.755. 2967 4299

E-mail: [stony@nostop.cn](mailto:stony@nostop.cn)

URL: <http://www.nostopmotor.com>, <http://www.nostop.cn>